


IP-1015CS




IP-1015CS is a 2Way 8" all-in-one network ceiling speaker, incorporating all the features of the IP-1015BX Audio Bridge Box. The speaker can be operated in controller mode and provides powerful functions including BGM, scheduler, and TTS broadcasting.

- 2Way 8" UNIT
- Built-in 25W Class-D amplifier
- PoE+(IEEE 802.3at Type2 Class4) support
- 10/100 BASE-TX Ethernet
- 1GB Internal memory for audio storage (Expandable up to 32GB via MicroSD)
- VoIP, BGM, Scheduler, and TTS functions

IP-1015CS		
Type	2Way 8" Network Ceiling Speaker	
Driver	LF	8", V/C: 25.4mm / 8Ω
	HF	2", V/C: 13.28mm / 8Ω
Maximum SPL [Cont.]	96dB(PoE 802.3af)	100dB(PoE+ 802.3at)
Frequency Range	150Hz ~ 20kHz	
Nominal Dispersion(HxV)	1kHz	90°
	4kHz	60°
Enclosure	Material: ABS	
Amplifier		
Rated Output Power	10W	
Microphone		
Frequency Range	50Hz ~ 16kHz	
LINE Output		
Maximum Audio Output	+6dBV ± 3dB	
Frequency Response	20Hz - 20kHz(+1/-3dB)	
THD+N(20Hz HPF, AES17 LPF)	Less than 0.1%	
S/N(20Hz HPF, AES17 LPF, A-WTD)	More than 91dB	
Contact I/O		
Contact Input(1CH)	Dry Contact	
Contact Output(1CH)	Dry Contact(N.O: Normally Open)	
Storage	MicroSD	Maximum 32GB
Network		
Ethernet	10/100 BASE-TX PoE	
General		
Power	PoE(IEEE 802.3af, IEEE 802.3at)	
Connectors	Ethernet Jack(RJ-45)	
Operating Temperature	-20°C ~ +50°C	
Power Consumption	PoE(IEEE 802.3af): 44 ~ 57 VDC, Maximum 12.95W PoE+(IEEE 802.3at): 50 ~ 57 VDC, Maximum 25.5W	
Weight(Set)	2.2kg	
Dimensions(Set)	Φ264(W) x 157(H)mm	

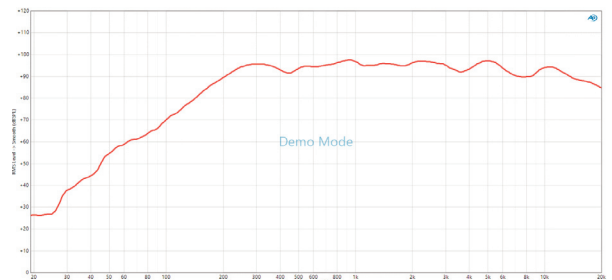

Frequency Range

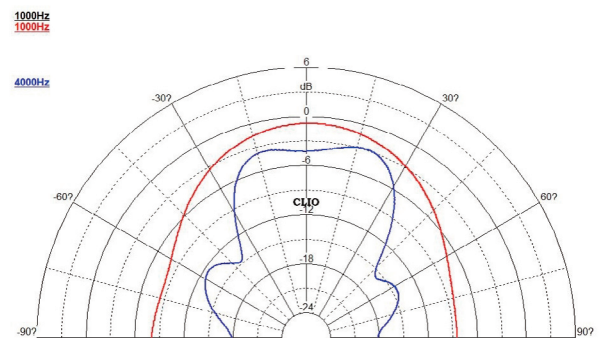

Polar Pattern