

Program Distributor

PO-6106



Program Distributor

PO-6106



- **EASY TO OPERATE**
 - Distributes a single channel input to six outputs.
- **EASY LEVEL ADJUSTMENT**
 - Front-panel input and output level adjustment.
- **INPUT MONITORING**
 - Input peak LED monitoring.

FRONT/REAR PANEL



- 1 INPUT PEAK INDICATOR
- 2 OUTPUT INDICATORS
- 3 POWER INDICATOR


- 4 INPUT LEVEL CONTROL
- 5 OUTPUT LEVEL CONTROL
- 6 POWER SWITCH




- 1 LINE INPUT
- 2 LINE OUTPUTS 1-6

- 3 AC POWER INPUT
- 4 DC POWER INPUT

APPLICATIONS

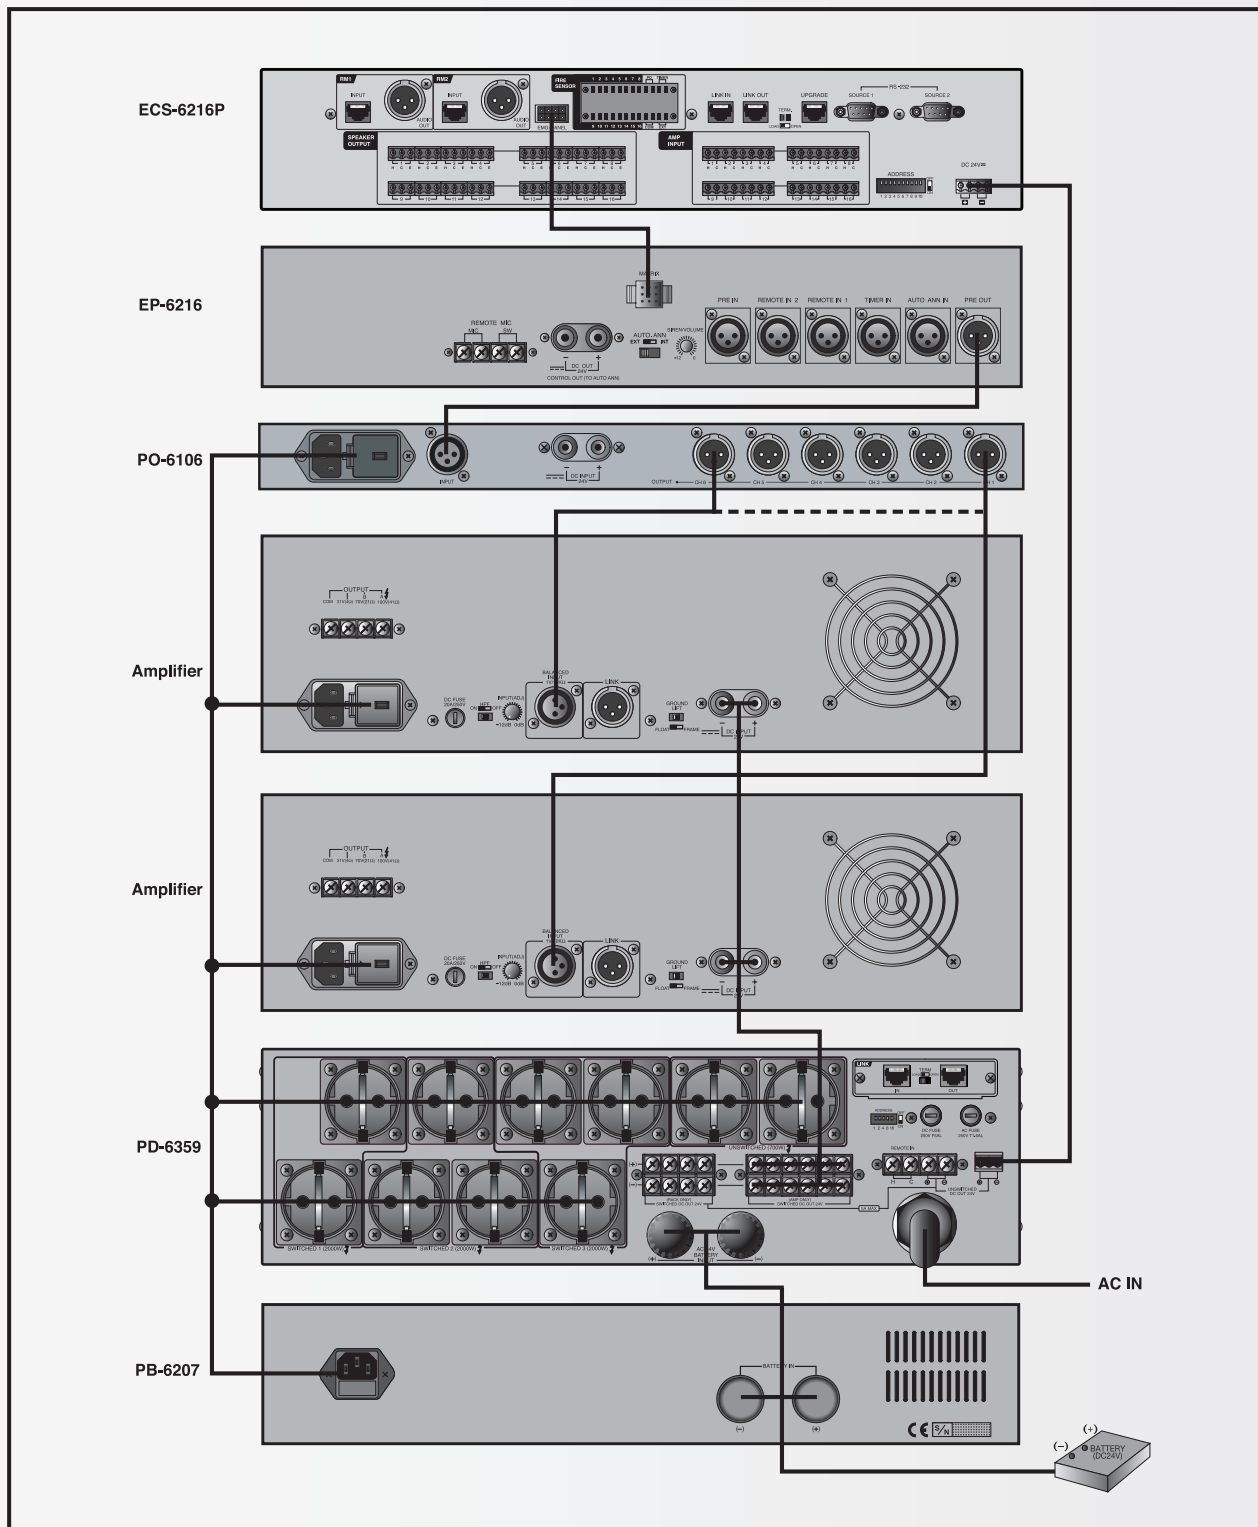


BLOCK DIAGRAM

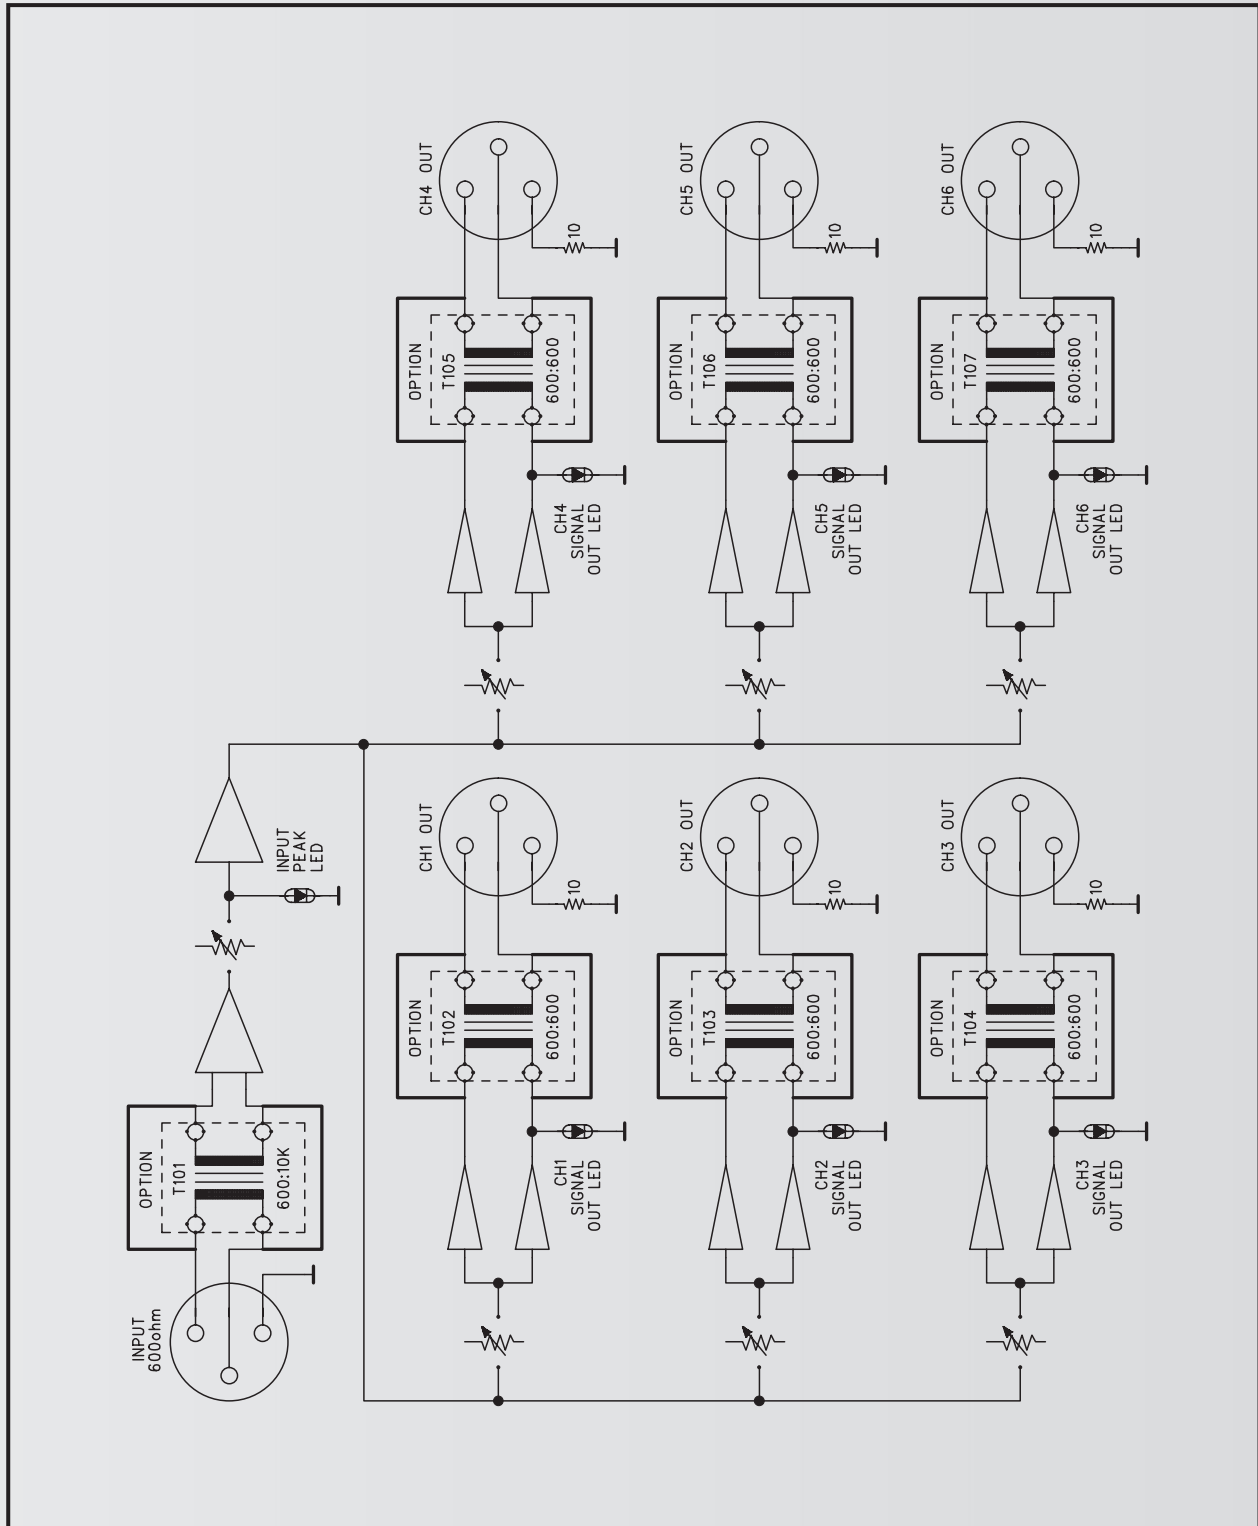

SPECIFICATIONS

	PO-6106
Channels	1 Input, 6 Outputs
Frequency Response	20Hz-20kHz (± 3 dB)
T.H.D at 1kHz, Rated Output	Less than 0.1%
Input Sensitivity/Impedance	1V/600 Ω Balanced
Output Level/Impedance	100mV/600 Ω Balanced
S/N	Better than 75dB
Operation Temperature	-10°C ~ +40°C / 14°F ~ 104°F
Power Source	100–120VAC or 220–240VAC; 50/60Hz, DC 24V (Supplied AC main transformer depends on country requirements)
Power Consumption	8W
Weight (SET)	4kg/8.8lb
Dimensions (SET)	482(W)xx44(H)x280(D)mm/19(W)x1.7(H)x11(D)in

DIMENSIONS

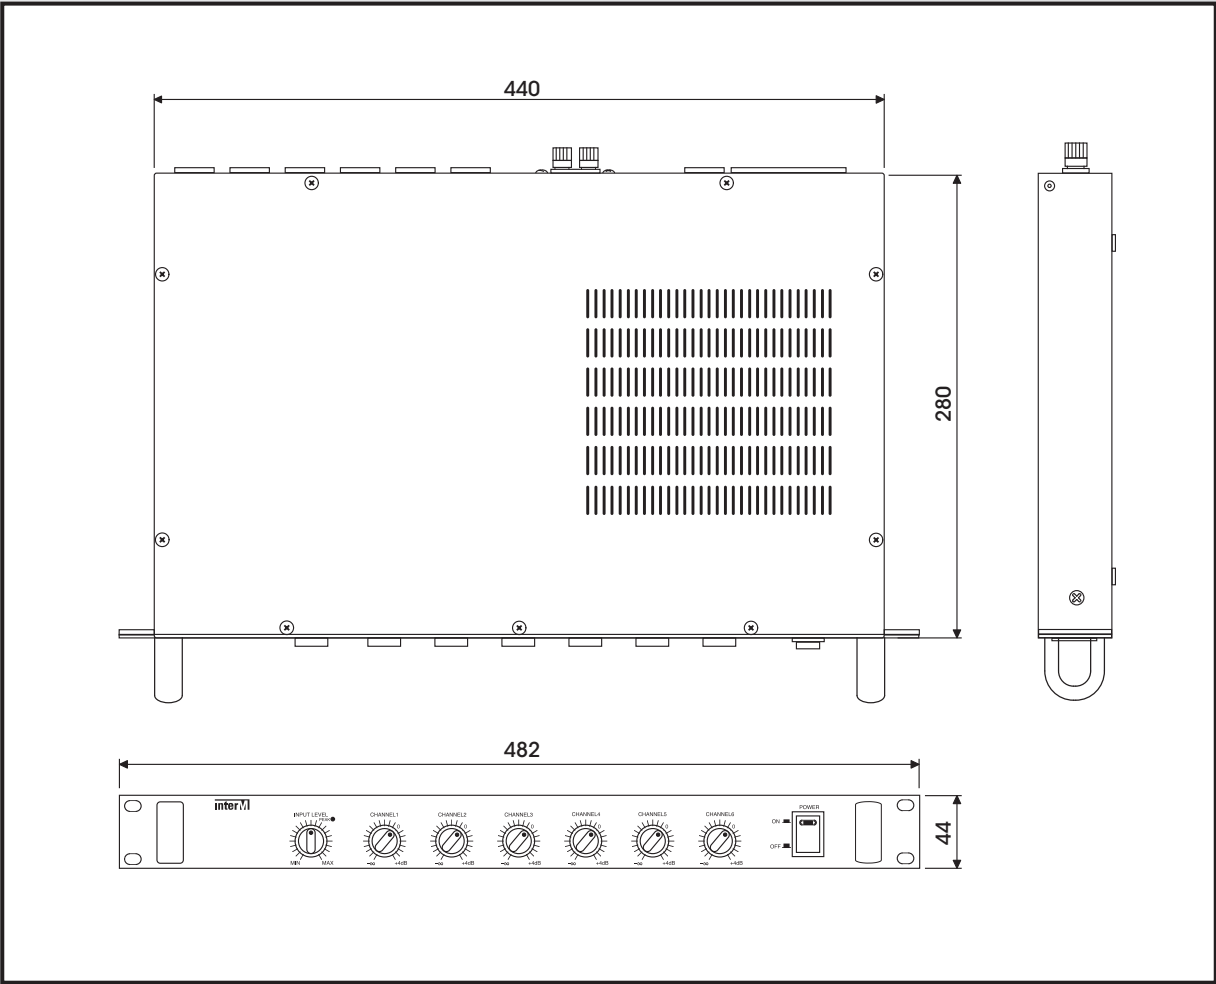



Inter-M Corp. (IMK)

719, Dobong-ro, Dobong-gu, Seoul, Korea
Overseas Sales Team

Tel_ +82-2-2289-8141~7 Fax_ +82-2-2289-8149 E-mail_ overseas@inter-m.com

www.inter-m.com