


IP-1015HSA




IP-1015HSA is a all-in-one network horn speaker, incorporating all the features of the sophisticated PA controller unit. The speaker can be operated in controller mode and provides powerful functions including BGM, scheduler, and TTS broadcasting. Featuring an IP66 protection rating, IP-1015HSA is suitable for various outdoor environments.

- 1" Dome type Driver
- Built-in 25W Class-D amplifier
- IP66 dust and water protection
- PoE+(IEEE 802.3at Type2 Class4) support
- 10/100 BASE-TX Ethernet
- 1GB Internal memory for audio storage
- VoIP, BGM, Scheduler, and TTS functions


IP-1015HSA		
Type	Network Horn Speaker	
Driver	1" Dome type (10W), V/C: 28mm, 8Ω	
Maximum SPL [Cont.]	121dB(PoE 802.3af)	124dB(PoE+ 802.3at)
Frequency Range	300Hz~5.5kHz	
Nominal Dispersion(HxV)	1kHz	110° x 140°
	4kHz	60° x 70°
Enclosure	Material: ABS, Aluminium	
Amplifier		
Rated Output Power	10W	
Microphone		
Frequency Range	50Hz~16kHz	
Contact I/O		
Contact Input (1CH)	Dry contact	
Contact Output (1CH)	Dry Contact (N.O : Normally Open), DC 30V, 1A Max	
Network		
Ethernet	10/100 BASE-TX PoE	
General		
Power	PoE(IEEE 802.3af, IEEE 802.3at)	
Connectors	Ethernet Jack(RJ-45)	
Operating Temperature	-40°C ~ +60°C	
IP rating	IP66	
Power Consumption	PoE (IEEE 802.3af) : 44~57 VDC, Max 12.95W PoE+ (IEEE 802.3at) : 50~57 VDC, Max 25.5W	
Weight(Set)	2.5kg	
Dimensions(Set)	254(W) x 169(H) x 310(D)mm	

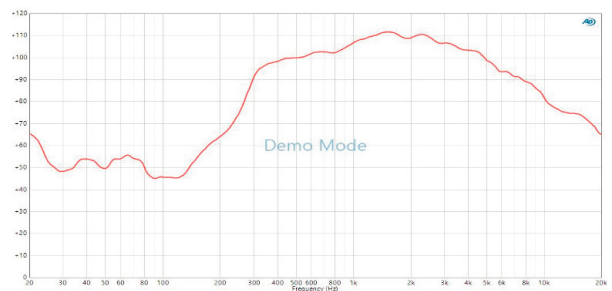

Frequency Response

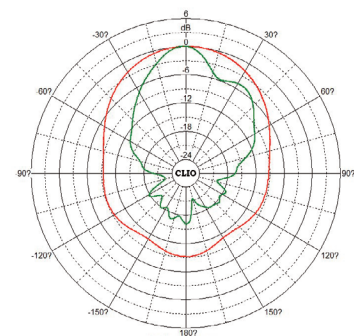

Polar Pattern(H)

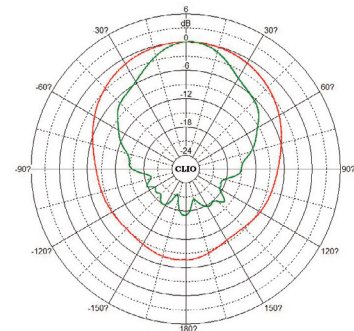

Polar Pattern(V)