


IP-1015WS




IP-1015WS is a 2Way 5" all-in-one network wall-mount speaker, incorporating all the features of the IP-1015BX Audio Bridge Box. The speaker can be operated in controller mode and provides powerful functions including BGM, scheduler, and TTS broadcasting. .Featuring an IP54 protection rating, IP-1015WS is suitable for both indoor and outdoor installation.

- 2Way 5" UNIT
- Built-in 25W Class-D amplifier
- IP54 dust and weather protection
- PoE+(IEEE 802.3at Type2 Class4) support
- 10/100 BASE-TX Ethernet
- 1GB Internal memory for audio storage (Expandable up to 32GB via MicroSD)
- VoIP, BGM, Scheduler, and TTS functions


IP-1015WS		
Type	2Way 5" Network Wall Speaker	
Driver	LF	5", V/C : 25.4mm / 8Ω
	HF	0.5", V/C : 13.4mm / 8Ω
Maximum SPL [Cont.]	96dB(PoE 802.3af)	99dB(PoE+ 802.3at)
Frequency Range	120Hz ~ 20kHz	
Nominal Dispersion(HxV)	1kHz	180° x 120°(1kHz)
	4kHz	120° x 70°
Enclosure	Type : Bass-reflex/Material : ABS	
Amplifier		
Rated Output Power	10W	
Microphone		
Frequency Range	50Hz ~ 16kHz	
LINE Output		
Maximum Audio Output	+6dBV ± 3dB	
Frequency Response	20Hz - 20kHz(+1/-3dB)	
THD+N(20Hz HPF, AES17 LPF)	Less than 0.1%	
S/N(20Hz HPF, AES17 LPF, A-WTD)	More than 91dB	
Contact I/O		
Contact Input(1CH)	Dry Contact	
Contact Output(1CH)	Dry Contact(N.O: Normally Open)	
Storage	MicroSD	Maximum 32GB
Network		
Ethernet	10/100 BASE-TX PoE	
General		
Power	PoE(IEEE 802.3af, IEEE 802.3at)	
Connectors	Ethernet Jack(RJ-45)	
Operating Temperature	-20°C ~ +50°C	
Power Consumption	PoE(IEEE 802.3af): 44 ~ 57 VDC, Maximum 12.95W PoE+(IEEE 802.3at): 50 ~ 57 VDC, Maximum 25.5W	
Weight(Set)	2.4kg	
Dimensions(Set)	173(W) x 250(H) x 137.5(D)mm	

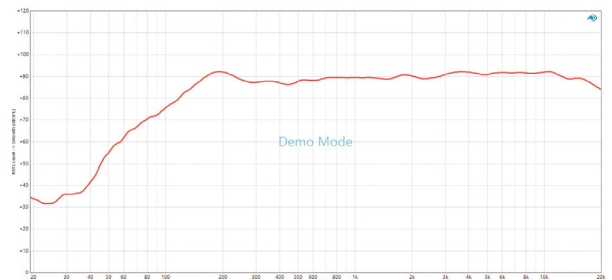

Frequency Response

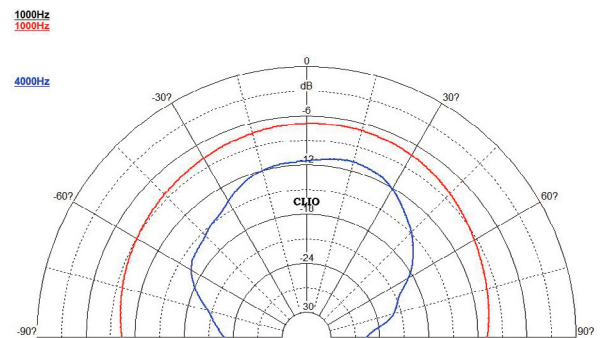

Polar Pattern(H)

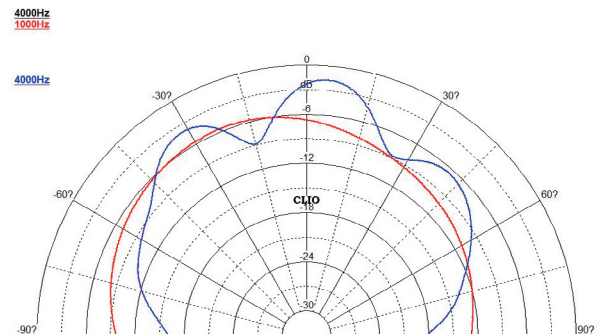

Polar Pattern(V)