

Power Distributor

PD-6359



Power Distributor

PD-6359



The PD-6359 is a rack-mountable power distributor.
it offers a convenient way to power a rack full of equipment.

- **AC/DC Power Distribution**

- PD-6359 is the customized AC/DC power solution for Inter-m rack mount system and it will power up and protect all system equipment.
- SWITCHED : The power is supplied when the main power switch is on.
- UNSWITCHED : The power is supplied regardless the main power switch is on or off.
- AMP ONLY : The terminal to delivered a DC 24V from the battery when AC power cut off.

- **Heavy Duty Power Distribution**

- AC 220V : 2000W x 3(SWITCHED)
700W x 1(UNSWITCHED)
- DC 24V : 5A

- **PC Monitoring**

- Power supply status monitoring by window program of 6000 system

- **Remote Control**

- Remote option allows turn-on and turn-off at a distance by window program of 6000 system or remote contact terminal.

- **Sequential Power Distribution**

- When power switch is on, it turn-on delay intervals by 2 seconds in order of AC CH3 → AC CH2 → AC CH1. When switched to "OFF," the sequence is reversed.

- **Constant Power Distribution**

- UNSWITCHED AC/DC power outlet for equipments that require a uninterruptible power supply

- **BATTERY INPUT**

- The terminal connects with battery and supplies DC power 24V to equipments when power outages occur.


- **Voltage/Current Display**

- Front LCD displays status of power distribution

- **AC/DC Power Fuse**

- The easy accessible power fuse provide optimal over-load protection and easy maintenance.

FRONT/REAR PANEL

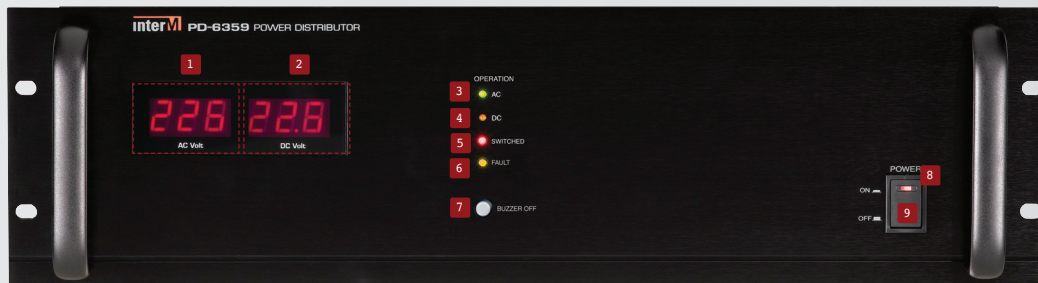

- 1 AC VOLT METER
- 2 DC VOLT METER
- 3 AC LED
- 4 DC LED
- 5 SWITCHED LED

- 6 FAULT LED
- 7 BUZZER OFF SWITCH
- 8 POWER LED
- 9 POWER SWITCH



- 1 AC SWITCHED OUTPUT
- 2 AC UNSWITCHED OUTPUT
- 3 ADDRESS SWITCH
- 4 LINK IN/OUT TERMINAL
- 5 TERMINATION SWITCH
- 6 AC FUSE
- 7 DC FUSE
- 8 DC POWER OUTPUT TERMINAL (UNSWITCHED)


- 9 AC POWER CORD
- 10 REMOTE TERMINAL
- 11 DC POWER OUTPUT TERMINAL (FOR AMP)
- 12 BATTERY POWER INPUT TERMINAL
- 13 DC POWER OUTPUT TERMINAL (FOR RACK)
- 14 STATUS TERMINAL

SPECIFICATIONS

		PD-6359
AC OUTLET	Europe	SWITCHED : 2000W x 3, UNSWITCHED : 700W x 1
	U.S.A	SWITCHED : 1000W x 3, UNSWITCHED : 350W x 1
Remote Control		1
DC Power Output		DC 24V, 3.5A
Operation Temperature		-10℃ ~ +40℃
Power Source		100-120VAC or 220-240VAC; 50/60Hz (Supplied AC mains transformer depends on country requirements)
Power Consumption		220W
Weight (SET)		10.5kg/23.1lb
Dimensions (SET)		482(W)x132(H)x280(D)mm/19(W)x5.2(H)x11(D)in

※ Specifications and design are subject to change without notice.

DRAWING

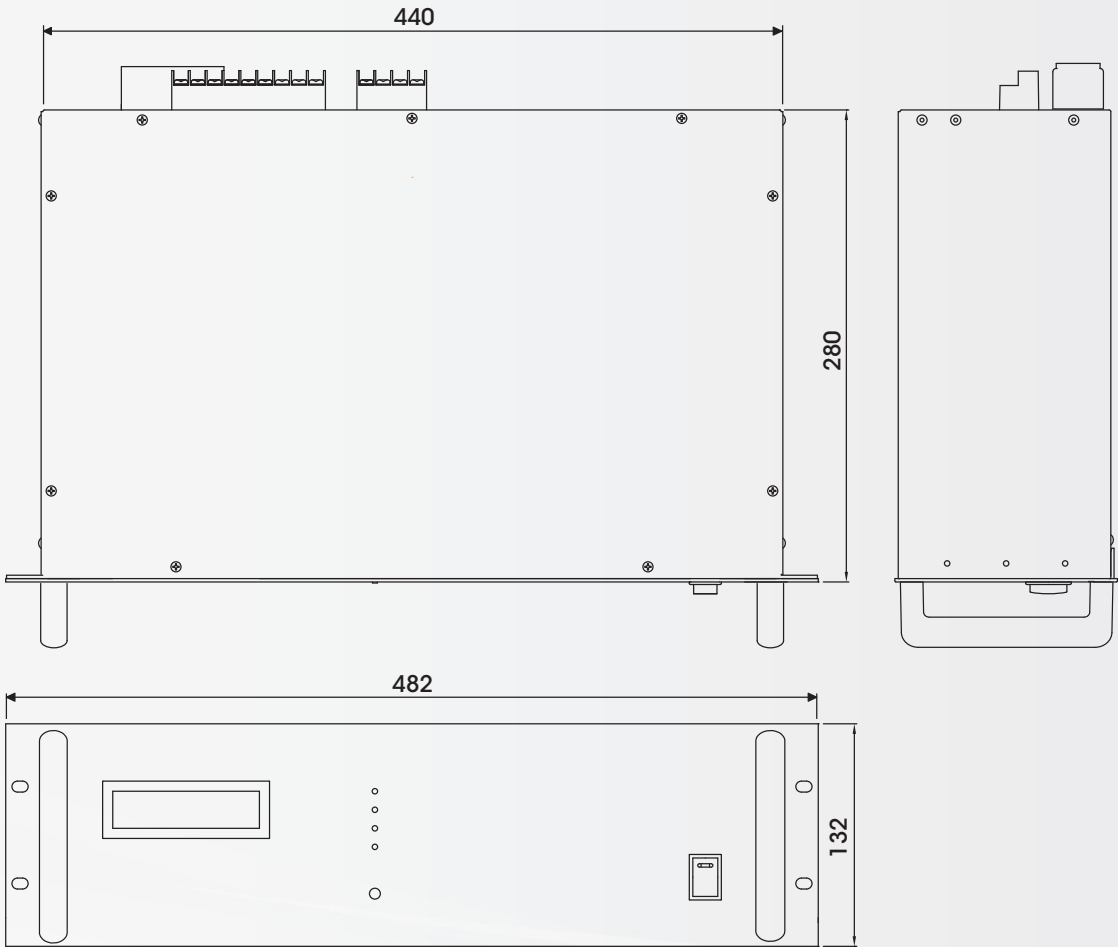



Inter-M Corp. (IMK)

719, Dobong-ro, Dobong-gu, Seoul, Korea
Overseas Sales Team

Tel_ +82-2-2289-8141~7 Fax_ +82-2-2289-8149 E-mail_ overseas@inter-m.com

www.inter-m.net