



Program Exchanger

PG-6104

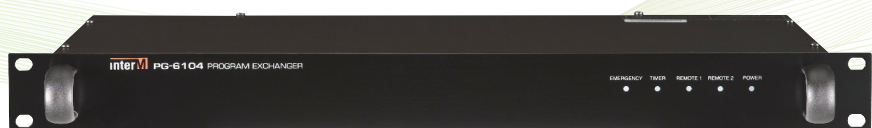

Program Exchanger

PG-6104

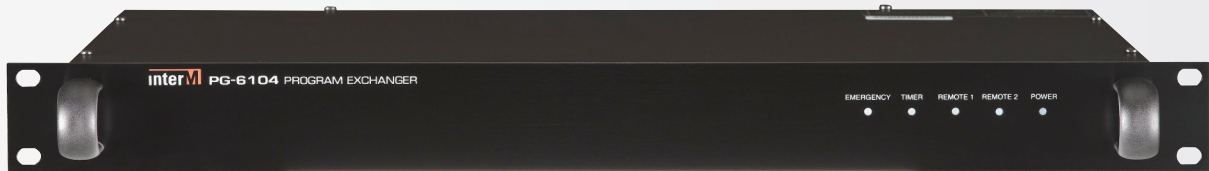

- **PROGRAM AUTO SELECTION**

- Remote, Timer, EM & Signal present by matrix and one input of them is selected automatically.

- **PRIORITY ORDER**

- Outputs first signal and isolates late signal by priority order feature.


- **QUADRUPLIX**

- 4 inputs & outputs for quadruplex broadcasting of school, hotel, department store etc.

- **INDICATOR**

- Each indicator indicates signal type of each broadcasting.

FRONT/REAR PANEL



- 1 EM LED
- 2 TIMER LED
- 3 REMOTE 1 LED


- 4 REMOTE 2 LED
- 5 POWER LED




- 1 LINE OUTPUT JACK
- 2 REMOTE 2 JACK
- 3 REMOTE 1 JACK
- 4 TIMER JACK

- 5 EM JACK
- 6 LINE INPUT JACK
- 7 EM CONNECTOR
- 8 MATRIX CONNECTOR

APPLICATIONS

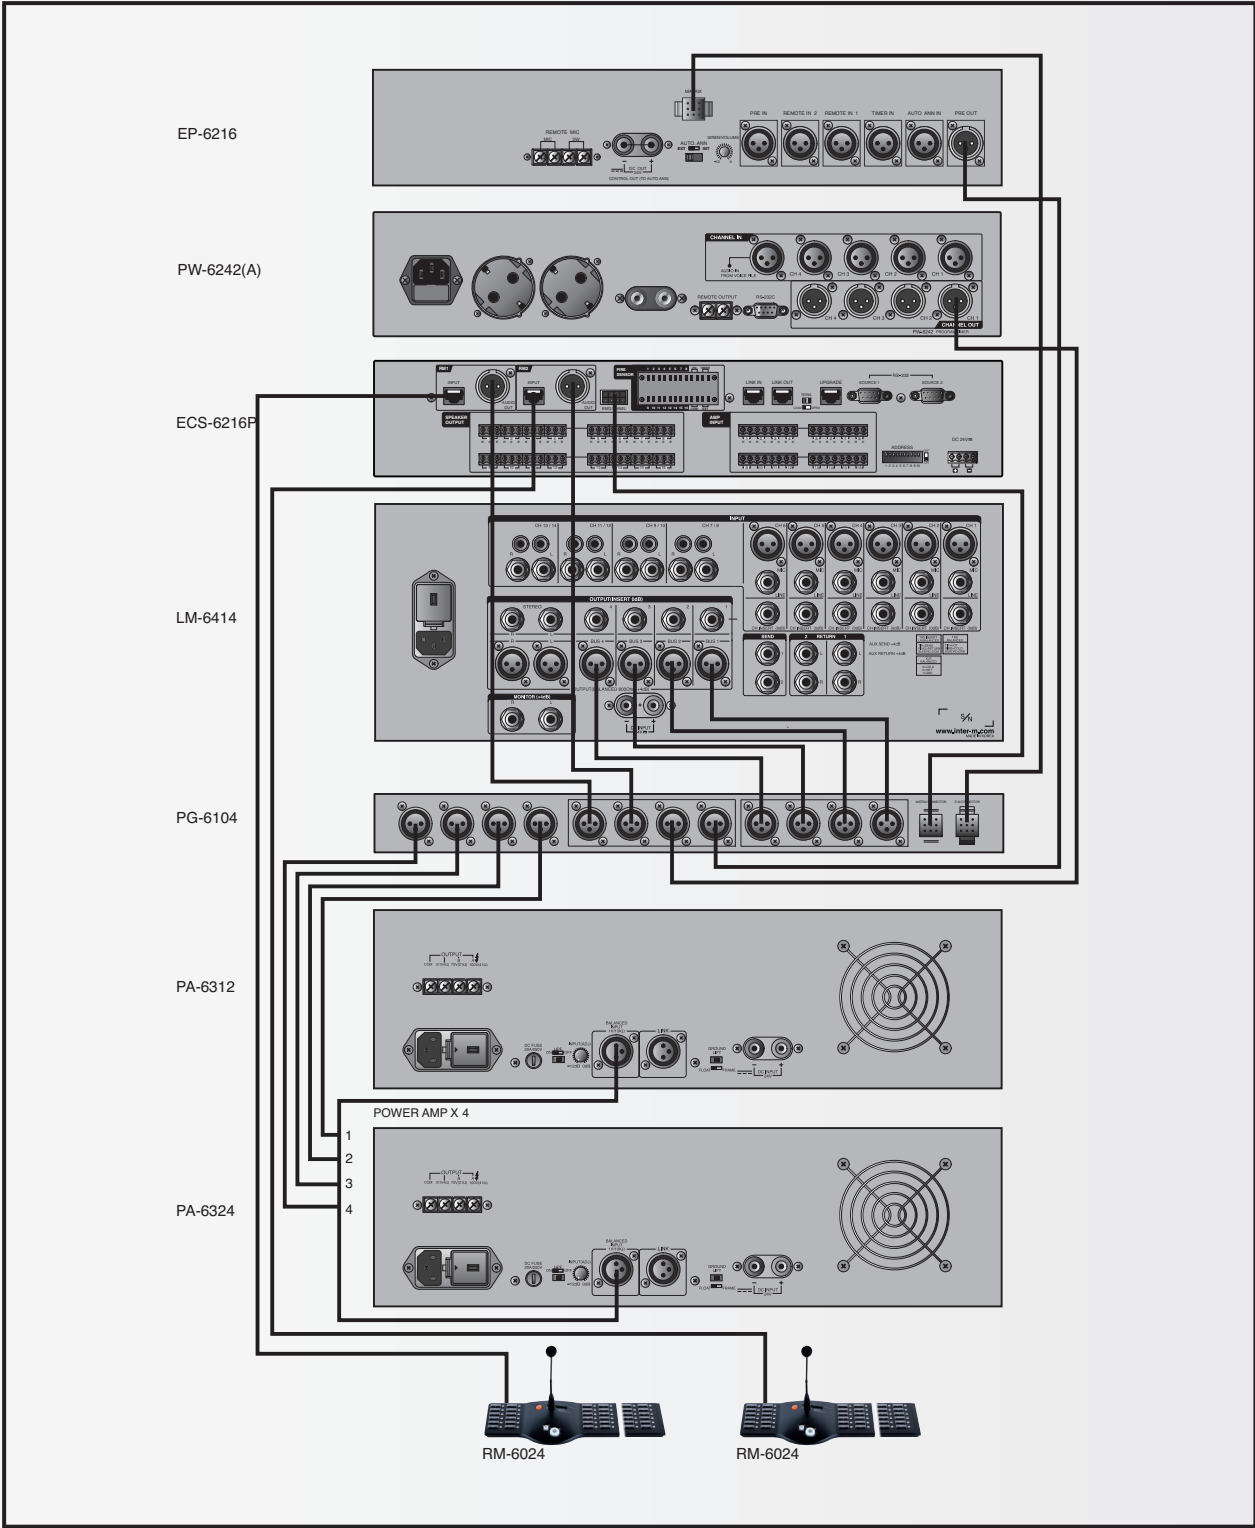


BLOCK DIAGRAM

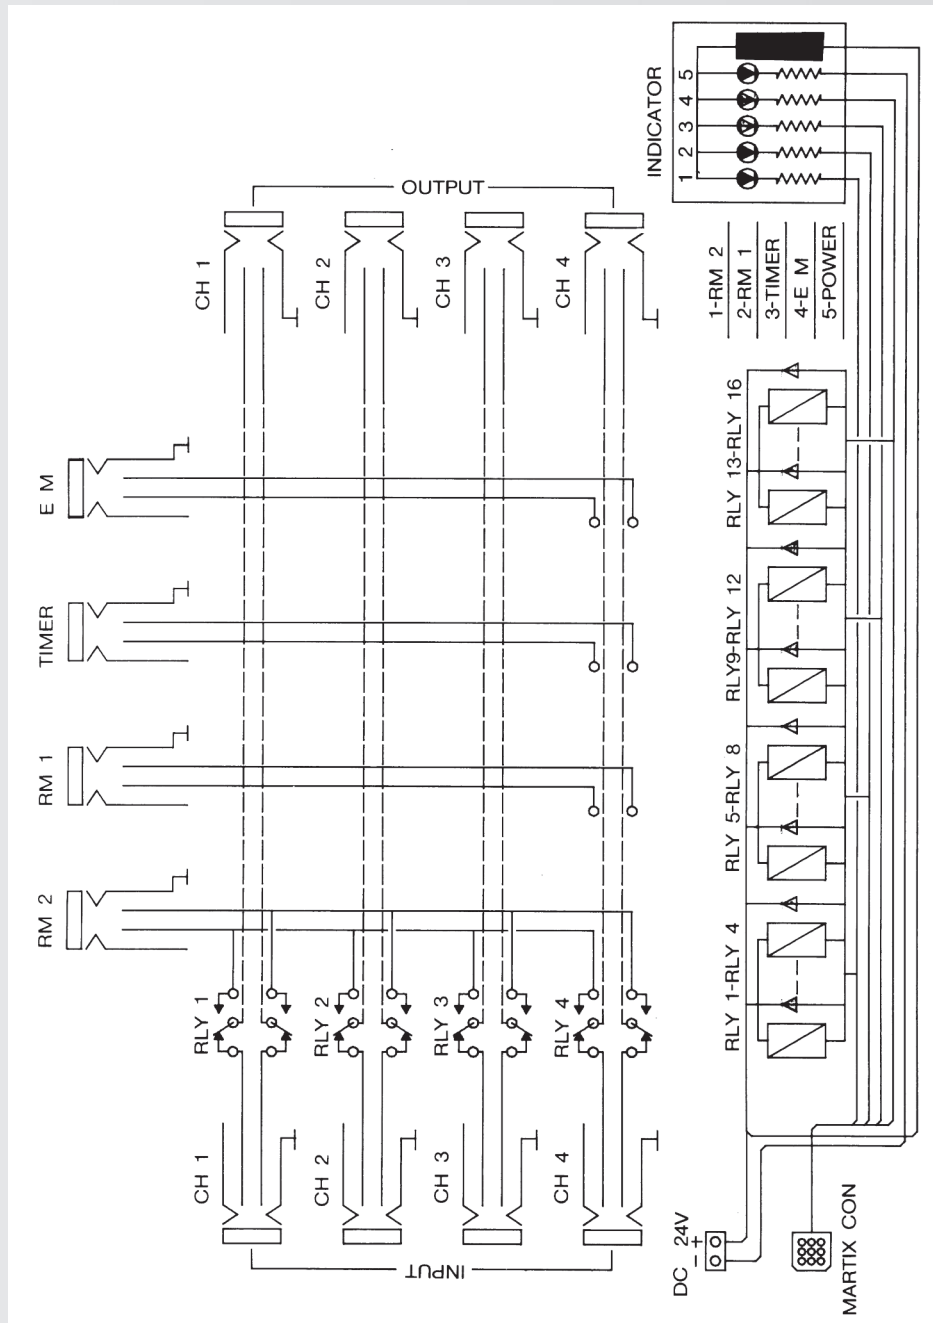

SPECIFICATIONS

	PG-6104
Activation	Auto
Program Exchanger	Less than 1%
Indicator	Better than 65dB
Power Source	24V DC
Weight (SET)	5kg/11lb
Dimensions (SET)	482(W)x44(H)x280(D)mm/19(W)x1.7(H)x11(D)in

DIMENSIONS

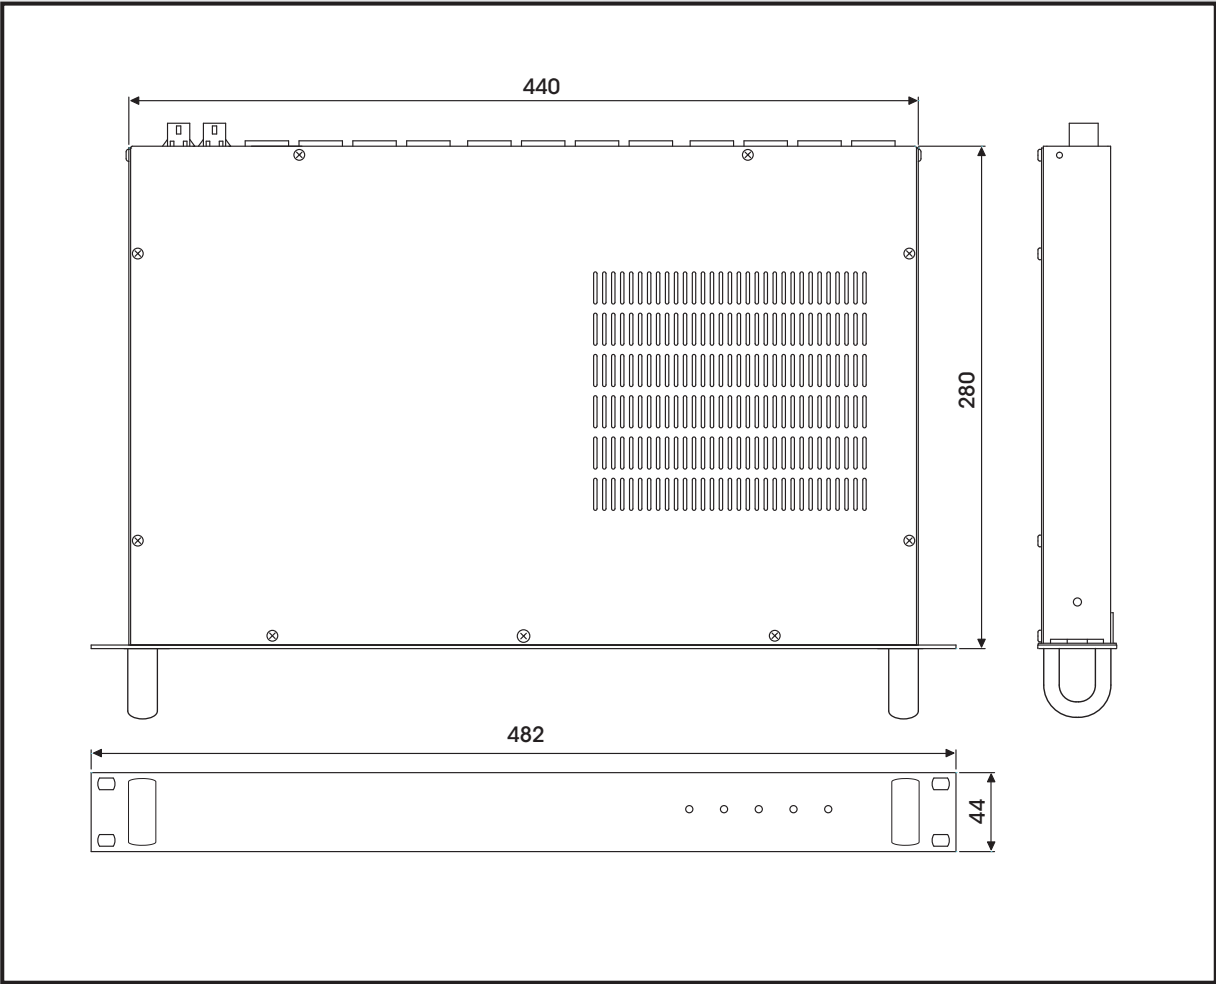



Inter-M Corp. (IMK)

719, Dobong-ro, Dobong-gu, Seoul, Korea
Overseas Sales Team

Tel_ +82-2-2289-8141~7 Fax_ +82-2-2289-8149 E-mail_ overseas@inter-m.com

www.inter-m.com