


Line Monitor

LM-6228

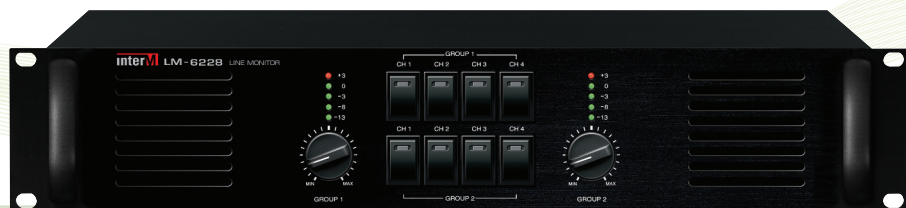

Line Monitor


LM-6228



LM-6228 is a device to monitoring output signal of mixer and line out signal from sound source equipments.

- **Built-in Monitoring Speaker**
 - High-powered, full-fidelity speaker for convenient monitoring of selected amplifier channel.
- **LED Level Meter**
 - LED meters on front panel indicate the output level of each channel.
- **Individual Monitoring of 8 Channel**
 - Eight switches select any channel's output to be monitored by the front panel speaker.
- **Stereo Monitoring**
 - Monitoring 8 channel mono or 4 channel stereo
- **Monitoring Level Adjustment**
 - Monitoring level can be adjusted to different level.
- **LED Light**
 - If any selected LED lamp is on, that indicates a normal operation

FRONT/REAR PANEL

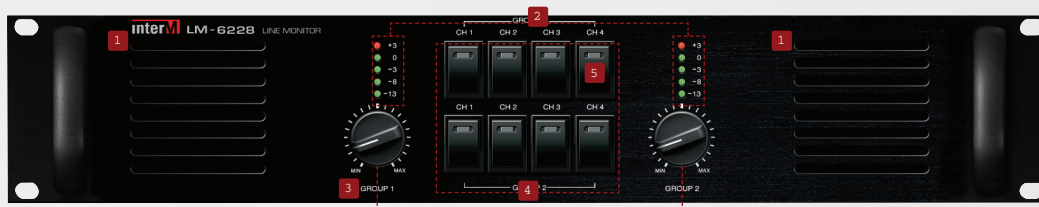

- 1 MONITOR SPEAKER
- 2 LED LEVEL METER
- 3 MONITOR CHANNEL VOLUME

- 4 CHANNEL SELECTOR SWITCHES
- 5 STATUS INDICATOR



- 1 LINE INPUT TERMINAL
- 2 LINE OUTPUT TERMINAL
- 3 DC INPUT TERMINAL


Line Monitor

LM-6228

SPECIFICATIONS

	LM-6228
Monitor Speaker Output Power	4Ω/0.5W
Frequency Response	20Hz ~ 20kHz(±1dB)
S/N	Better than 100dB
Input Sensitivity	1V, 50kΩ
Line Out	1V, 50kΩ
Weight (SET)	7.5kg/16.5lb
Dimensions (SET)	482(W)x88(H)x280(D)mm/9(W)x3.5(H)x11(D)in

※ Specifications and design are subject to change without notice.

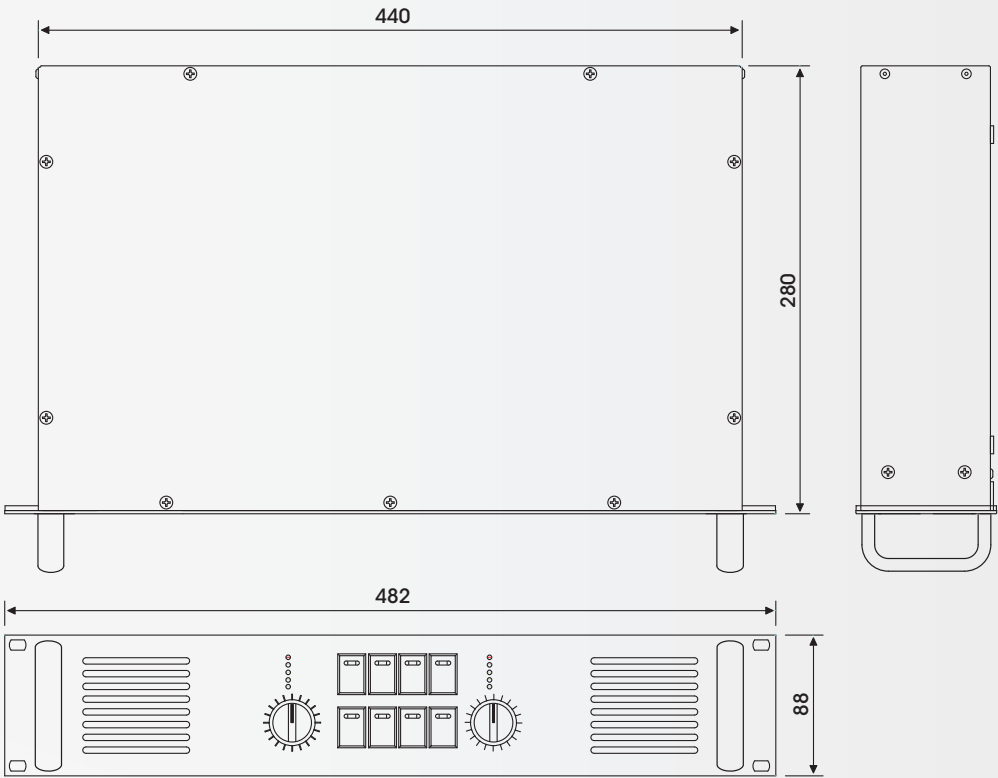



Inter-M Corp. (IMK)

719, Dobong-ro, Dobong-gu, Seoul, Korea
Overseas Sales Team

Tel_ +82-2-2289-8141~7 Fax_ +82-2-2289-8149 E-mail_ overseas@inter-m.com

www.inter-m.com